


SZK 19" air conditioning Cabinets

DESCRIPTION:

Cabinets for installation on SK1 channel sump.

- Made of sheet metal with Magnelis coating 1.5mm thick, plinth made of sheet metal with a Magnelis coating 2 mm thick, 150 mm high, ventilation holes from three sides, covered with a filter mat, - IP65 protection and mechanical resistance IK10,
- The housing walls have a 30mm expansion gap (double walls),
- A polyurethane gasket is poured on the door,
- Lockable with a 3-point bolt lock with a padlock bolt, swing handle,
- 2 pairs of 19" rack - adjustable distance between the front and rear pair from 290mm do 420mm, distance between the front of the body and the first pair of racks from 55mm do 125mm,
- 640W air conditioner (Voltage: 230 V),
- 3U voltage distribution panel,
- A heating set consisting of a CSL028 250W semiconductor blower controlled by an electronic hygrotherapy ETF 012,
- Additional fans controlled by a thermostat mounted in the roof,

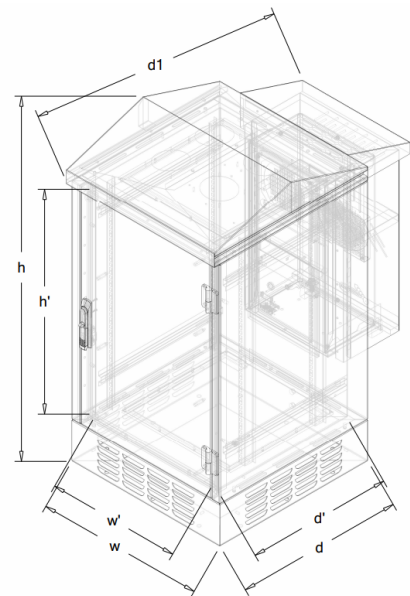

outdoor

On request, cabinet can be made of Aluminum.

Additional equipment:

- 19" 1U 340 mm shelf,
- PS 19" 1U SC SX / DX pull-out,
- PS 19" 2U SC DX pull-out.

Symbol	External dimensions (mm)			Internal dimensions (mm)		
	height (h)	width (w)	depth (d)	height (h')	width (w')	depth (d')
SZK 18U 19" z klimatizatorem	1160	610	890	804	487,7	529
SZK 30U 19" z klimatizatorem	1692	610	890	1336	487,7	529



SZK-18U z klimatizatorem